

Ice Cooled High Performance Drop In Dispenser


The ICD 2300 is designed using the highest quality materials and proven technology providing our customers with consistent drink quality.

2300 Ice Cooled Drop In Dispenser

- > Available with six or eight valves
- > Stainless steel construction with sealed in cold plate
- > 3/4" drain with strainer to prevent ice blockage
- > Stainless steel flooded soda manifold and multiple plain water configuration
- > Ice bin insulated with CFC free structural foam
- > Tower designed with removable splash plate and drip tray for easy cleaning
- > Dispenser can accommodate any number of non-carbonated drinks
- > Sliding bin lid with electric valve lock out
- Optional top merchandiser and back marquee feature lighted graphics for maximum impact
- > Dispensing Solutions that *Pour More*





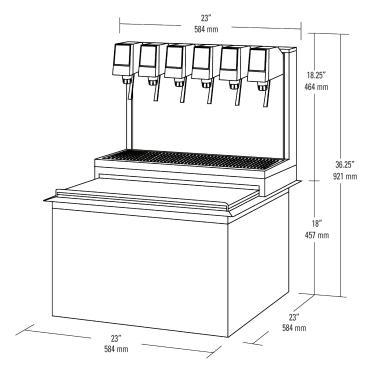

OPTIONS










Marquee Merchandiser

Splash Guards

Power Supply

CONVERSION STAND – 23" X 23"

- > All stainless steel construction
- > Front access panel
- > 6" (152 mm) adjustable legs
- Allows quick and easy conversion from drop in to free standing unit
- Shipping Weight: 80 lbs (36.28 kg)



Customer Service:

Should you require more information about our products, please do not hesitate to contact our customer service desk at **custserv@lancercorp.com.**

Warranty:

For warranty specifics by product, contact your Lancer Sales Representative. Equipment design and/or specifications are subject to change without notice.

Lancer Corp. 6655 Lancer Boulevard · San Antonio, TX 78219 210-310-7000 · 1-800-729-1500 · Fax: 210-310-7250









ICD 2300 High performance

SPECIFICATIONS

DIMENSIONS

Height: 36.25" (921 mm) Width: 23" (584 mm) Depth: 23" (584 mm)

COUNTER CUT-OUT

Width: 23.25" (591 mm) Depth: 23.25" (591 mm)

ELECTRICAL

24V/60Hz

WEIGHT

Operating: 270 lbs (122 kg) Shipping: 195 lbs (88 kg)

ICE

Capacity: 100 lbs (45 kg)

FITTINGS

Soda Inlets: 3/8" male barb Syrup Inlets: 3/8" male barb

VALVES

LEV® and other valves available upon request

FLEX MANIFOLD CONFIGURATION

6-valve 3-2-1 8-valve 3-1-1-3

KEY LOCK SWITCH

DRAW PERFORMANCE

Number of Drinks Below 40°F

75°F (24°C) Ambient Temperature

12 oz/12 drinks per minute 24 oz/7 drinks per minute

90°F (32°C) Ambient Temperature

12 oz/8 drinks per minute 24 oz/5 drinks per minute

(Units can supply drinks under 40°F at rated draw performance continuously as long as ice is kept on cold plate.)



lancercorp.com